VILLAGE OF
LINCOLNSHIRE

Project Contact

Michael Kowalski, PE
Construction Project Manager
mkowalski@ciorba.com
773-355-2954

Subscribe to Weekly Construction Updates!

https://www.lincolnshireil.gov/

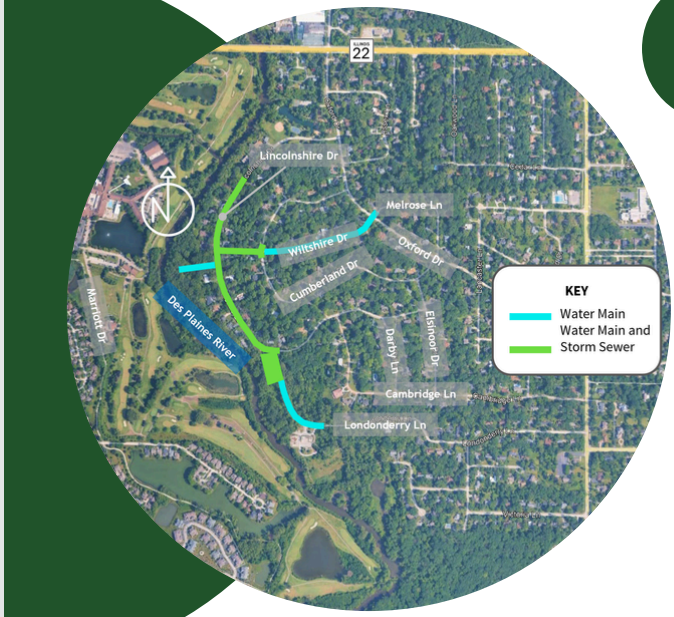

VILLAGE OF
LINCOLNSHIRE

2026 Lincolnshire Drive South

Drainage Improvement Project

2026 Lincolnshire Drive South Drainage Improvement Project

What's Happening?

The Village is starting a **$14.5 million construction project** to reduce flooding in the **Lincolnshire Drive South** neighborhood. People here have dealt with flooding for a long time, and this project will help fix that.

How Will It Help?

- A **new storm sewer system** will be able to handle more rainwater during big storms.
- A **stormwater pump station** will help move water into the Des Plaines River, even when the river is already high.
- In some areas, **grass swales (shallow ditches)** will help water drain from low spots behind curbs.

Together, these changes will help protect homes from flooding and keep streets drier after storms.

Stormwater Improvements

- **Wiltshire Drive:** New concrete storm sewers will run from Cumberland Drive to Lincolnshire Drive South.
- **Lincolnshire Drive South:** Pipes will start just north of Wiltshire and go south to Londonderry Lane.
- At **Londonderry Lane**, the pipes will turn and connect to the new **pump station** at **47 Londonderry Lane**.
- Pipe sizes will range from **12 inches** in diameter at the start to **60 inches** in diameter near the pump station.
- Two **24-inch pipes** will carry stormwater from the pump station to the **Des Plaines River**.

Water Main Upgrades

While the streets are open, the Village will also replace old water pipes with new 12-inch water mains:

- **Wiltshire Drive** (Oxford to Lincolnshire)
- **Lincolnshire Drive Sout**h (north of Wiltshire to Londonderry)
- **Londonderry Lane** (Lincolnshire to south of the pump station)

Road Work and Traffic

Streets will be restored after the pipe installations:

- **Lincolnshire Drive South:** Full rebuild from north of Wiltshire to Londonderry.
- **Wiltshire Drive:** Full rebuild from Lincolnshire to Cumberland. From Cumberland to Oxford, it will be patched and resurfaced.
- **Londonderry Lane:** Full rebuild from Lincolnshire to south of the pump station.

During construction:

- Expect lane closures and minor traffic delays.
- Flaggers and workers will direct traffic and assist residents.
- Project representatives will work with homeowners if driveways or parkways are affected.

VILLAGE OF
LINCOLNSHIRE

Construction Timeline

Start Date: *February 1, 2026*
End Date: *May 14, 2027*

Utility Relocation

Current to November 17, 2026

Traffic Flow Impacts

Be aware of periodic traffic delays with daily construction and daily lane closures.

Lane Closures

Daily lane closures with flaggers.

Questions

If you have comments, questions, or concerns, see the project contact info noted on the back page